
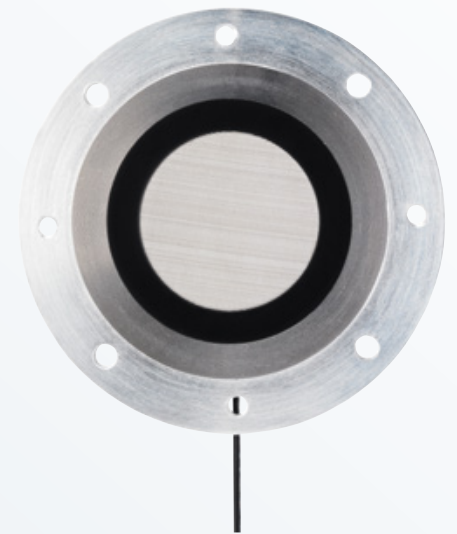


Turbulence mesh screen

- For near-field aeroacoustic measurements

NEW

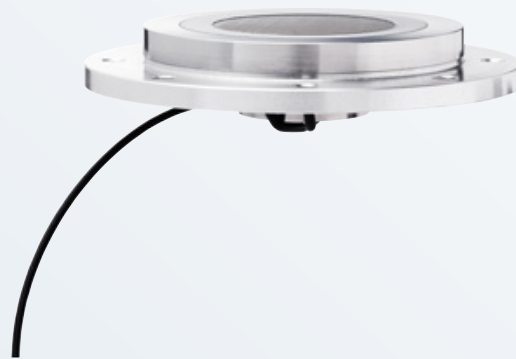

Aerospace



Automotive




Rail transportation

G.R.A.S.
SOUND & VIBRATION

Flush-mount Turbulence Screen

The new flush-mount turbulence screen is the latest innovation for aeroacoustic testing in wind tunnels. By attenuating the hydrodynamic component of turbulence up to as much as 25 dB, the acoustic signals of interest can now be diagnosed more reliably. The flush-mount turbulence screen integrates the flush and recessed mounting techniques with a special wire mesh, and allows for adaptation of several mounting options.

- *Very high flow noise reduction*
- *Very low acoustic attenuation*
- *Low installation height*
- *Front or rear mounting options*
- *1/4" Flush-mount and standard microphone accommodation*

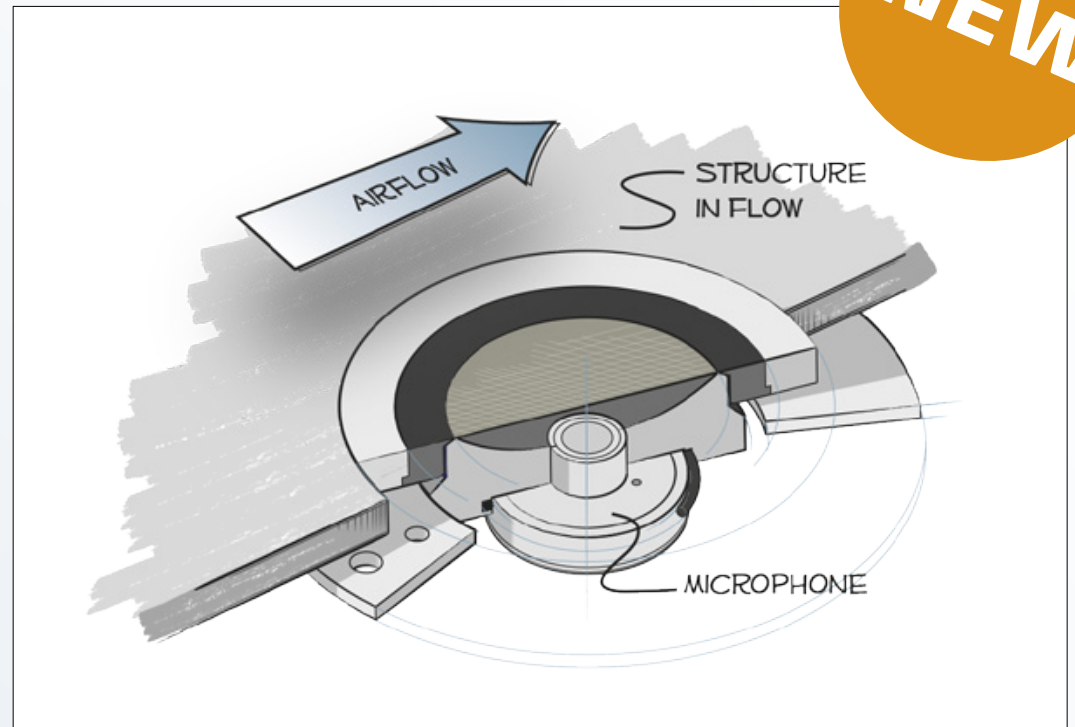

NEW



Flush-mount Turbulence Screen Kit

G.R.A.S. 67TS

Turbulence attenuation	Up to 25 dB*
Turbulence speed	Up to Mach 0.2
Frequency range (turbulence)	500 Hz - 10 kHz*
Acoustic attenuation	Less than 3 dB*
Approach	± 60 Deg
Frequency range (acoustic)	100 Hz - 70 kHz
Dynamic range	44 dB(A) - 166 dB
Venting	Front

*Depending on flow-speed

We Make Microphones

As the only 100% focused developer and manufacturer of measurement microphones, our goal is to provide our customers with the right sensor for the right application. Whether this is realized through a standard, special or customized sensor solution, our concern and priority are always to

help our customers achieve the best possible measurement results – every time.

All our microphones are based on our founder Gunnar Rasmussen's innovative and world-famous measurement microphone design. Designs

that have set the reference for all measurement microphones for more than 50 years. This evolution enables us to offer 5 years microphone warranty and the unique diaphragm repair service. Find more information and your local G.R.A.S. partner at gras.dk